


UNCERTAINTY IN CLIMATE DATA RECORDS FROM SATELLITE OBS'NS



Christopher Merchant
Department of Meteorology
University of Reading

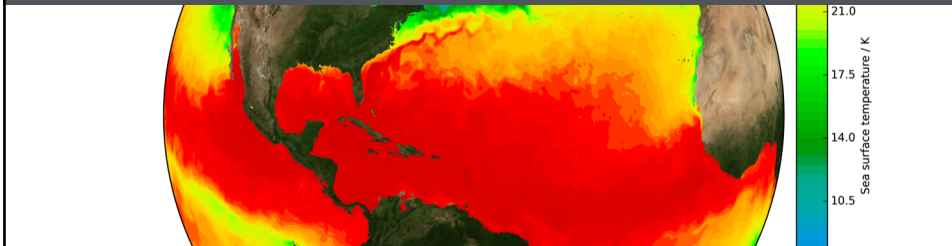

1

Copyright University of Reading

LIMITLESS POTENTIAL | LIMITLESS OPPORTUNITIES | LIMITLESS IMPACT

OUTLINE

- Why am I talking about this?
- Motivations to improve uncertainty information in climate data records (CDRs)
- Some recommendations for CDRs
- Obstacles to achieving these
- Ongoing scientific developments
- Some recommendations for FCDRs/FDRs
- Proposals to CEOS/CGMS agencies
- Where we want to get to
- Discussion!

2

LIMITLESS POTENTIAL | LIMITLESS OPPORTUNITIES | LIMITLESS IMPACT

RELEVANCE TO ME

- Science Leader for Sea Surface Temperature within the ESA Climate Change Initiative project, and involved in 3 other CCI projects involving uncertainty aspects



- PI (with co-PI Jon Mittaz) of H2020 project Fidelity and Uncertainty in Climate data records from Earth Observation



- Close collaboration with the Earth Observation and Climate group of the National Physical Laboratory, including uncertainty and quality aspects within the Copernicus Climate Change Service




3

LIMITLESS POTENTIAL | LIMITLESS OPPORTUNITIES | LIMITLESS IMPACT

MOTIVATIONS FOR UNCERTAINTY INFORMATION IN CDRS

- Uncertainty estimation is fundamental to any measurement science

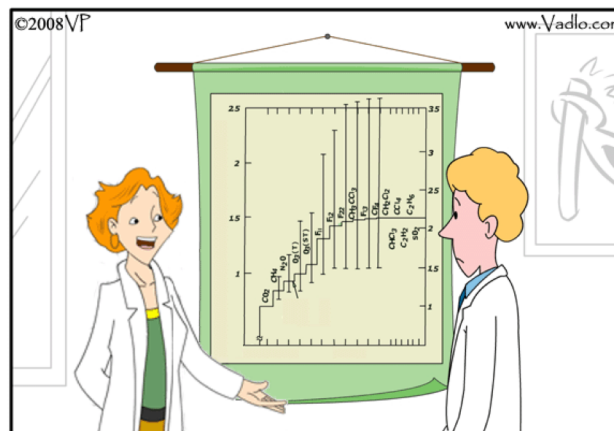


Did you really have to show the error bars?

Page 4

LIMITLESS POTENTIAL | LIMITLESS OPPORTUNITIES | LIMITLESS IMPACT

MOTIVATIONS FOR UNCERTAINTY INFORMATION IN CDRs


- Uncertainty estimation is fundamental to any measurement science
- Information about observational uncertainty in CDRs is needed in science
 - to quantify the confidence in inferences about changes in the Earth system (do we really know what we think we know?)
 - to support further propagation of uncertainty to higher-level studies
 - for informed model evaluation
 - as an element of observation error covariance in assimilation



- Requirements in society
 - to inform users (decision makers etc) about the data they are using

Page 5

LIMITLESS POTENTIAL | LIMITLESS OPPORTUNITIES | LIMITLESS IMPACT

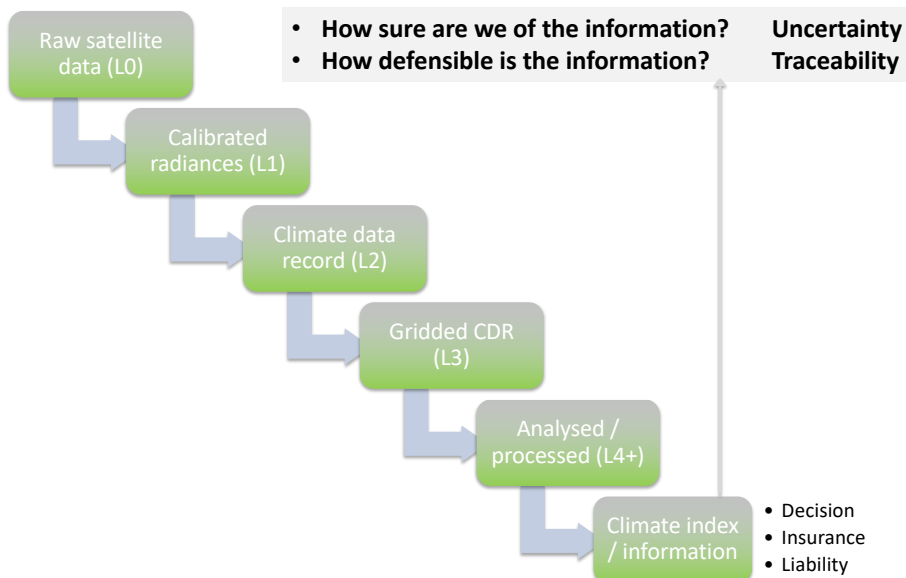

Uncertainty recommendations for CDRs

- Provide uncertainty estimates
- **Follow metrological conventions**
- Give u per datum if necessary
- Uncertain \neq Bad quality
- Explain the uncertainty info
- Give advice to users on usage
- Validate the uncertainties
- Error correlation matters
- DOI 10.5194/essd-9-511-2017
- Don't re-invent what the measurement science community spent decades deliberating about
- **Nomenclature** for unambiguous communication
 - Measurand, effects, error, uncertainty, ...
- Tried-and-tested **methodologies** for estimating uncertainty
- Numerical data by default should be associated with an estimate of **standard uncertainty**



CCI+ Collocation



Uncertainty recommendations for CDRs

- Provide uncertainty estimates
- Follow metrological conventions
- **Give uncertainty per datum if necessary**
- Uncertain \neq Bad quality
- Explain the uncertainty info
- Give advice to users on usage
- Validate the uncertainties
- Error correlation matters
- DOI 10.5194/essd-9-511-2017







CCI+ Collocation



Land Surface Temperature Uncertainties

Random (Radiance and Emissivity)

Locally correlated (Atmosphere & Em.)

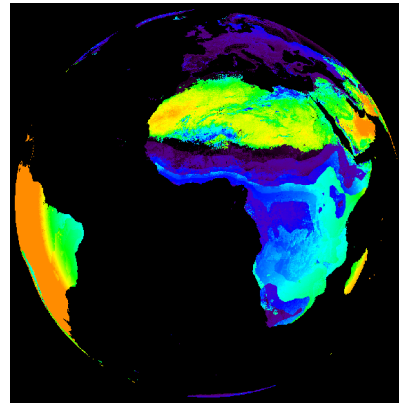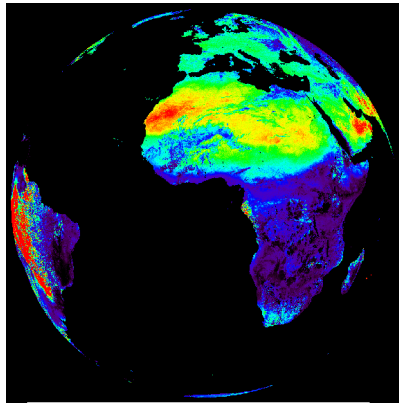

Uncertainty recommendations for CDRs

- Provide uncertainty estimates
- Follow metrological conventions
- Give uncertainty per datum if necessary
- **Uncertain \neq Bad quality**
- Explain the uncertainty info
- Give advice to users on usage
- Validate the uncertainties
- Error correlation matters
- DOI 10.5194/essd-9-511-2017
- Given per datum uncertainty estimates, a highly uncertain estimate is not poor quality ...
- ... if that uncertainty is confidently estimated and is provided to the user



CCI+ Collocation



Uncertainty recommendations for CDRs

- Provide uncertainty estimates
 - Follow metrological conventions
 - Give u per datum if necessary
 - Uncertain \neq Bad quality
 - **Explain the uncertainty info**
 - **Give advice to users on usage**
 - Validate the uncertainties
 - Error correlation matters
- DOI 10.5194/essd-9-511-2017




CCI+ Collocation



Uncertainty recommendations for CDRs

- Provide uncertainty estimates
 - Follow metrological conventions
 - Give u per datum if necessary
 - Uncertain \neq Bad quality
 - Explain the uncertainty info
 - Give advice to users on usage
 - **Validate the uncertainties**
 - Error correlation matters
- DOI 10.5194/essd-9-511-2017
- Validation is sometimes used to generate uncertainty estimates, which is not what is meant here
 - Where we model and provide quantitative uncertainty, those numbers should also be validated

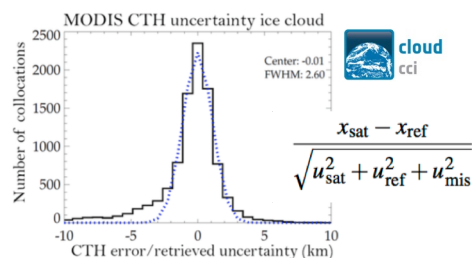


CCI+ Collocation



Uncertainty recommendations for CDRs

- Provide uncertainty estimates
 - Follow metrological conventions
 - Give u per datum if necessary
 - Uncertain \neq Bad quality
 - Explain the uncertainty info
 - Give advice to users on usage
 - Validate the uncertainties**
 - Error correlation matters
- Validation is sometimes used to generate uncertainty estimates, which is not what is meant here
 - Where we model and provide quantitative uncertainty, those numbers should also be validated

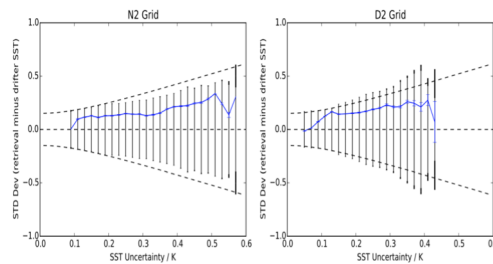


CCI+ Collocation



Uncertainty recommendations for CDRs

- Provide uncertainty estimates
 - Follow metrological conventions
 - Give u per datum if necessary
 - Uncertain \neq Bad quality
 - Explain the uncertainty info
 - Give advice to users on usage
 - Validate the uncertainties
 - Error correlation matters**
- Where CDR products are generated on different scales (e.g., full res and gridded variants) consistent uncertainty information can only be propagated if error correlation is accounted for

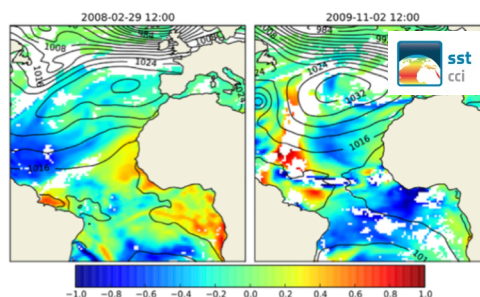

CCI+ Collocation




OBSTACLES TO PROVIDING UNCERTAINTY INFORMATION

- Lack of expertise, confusion about uncertainty concepts, unawareness of best practice
- Adopt, extend and communicate the concepts from laboratory metrology
- Need “EO metrology”
- Resources, since uncertainty estimation roughly doubles the effort of creating data
- Funding aspect
- Tools, guidelines, precedents
- Scepticism that user communities will use the information
- Trail-blazing that demonstrates value
- And ...

17

LIMITLESS POTENTIAL | LIMITLESS OPPORTUNITIES | LIMITLESS IMPACT

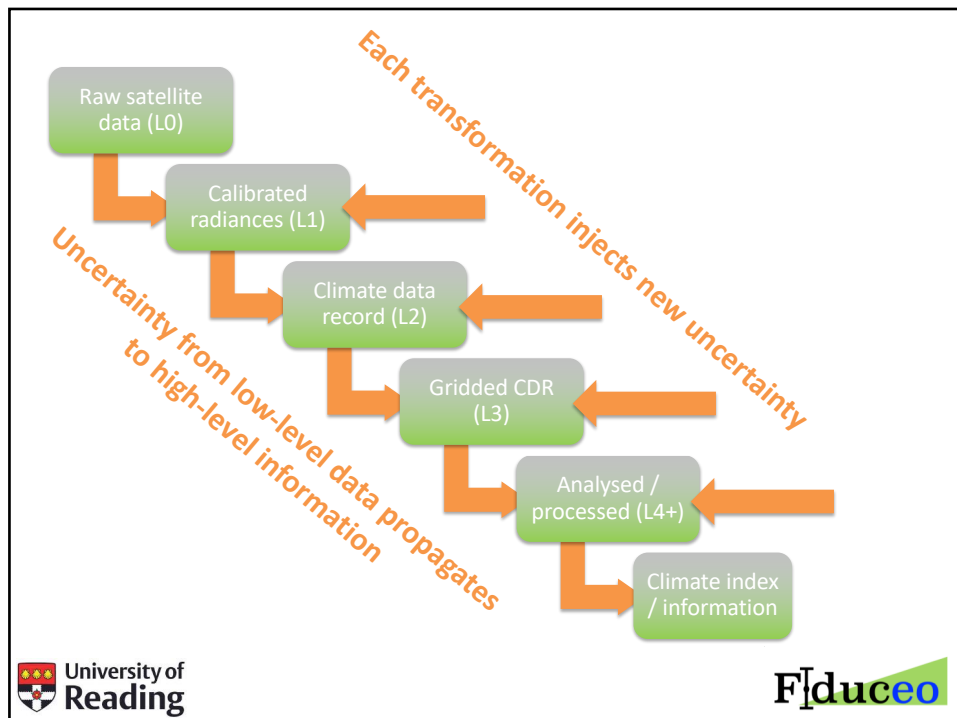

FIDUCEO



- **Fidelity and Uncertainty in Climate data records from Earth observation**
- **Ambition:** develop a widely applicable **metrology of Earth observation (EO)**
- **Motivation:** establish **defensible, uncertainty-quantified evidence (CDRs)** for climate and environmental change from space assets
- **Limitation of the status quo:** the level-1/radiance/FCDR uncertainty is not characterised, and **therefore cannot be propagated to the CDR**

More info, blog etc at: www.fiduceo.eu




Quantifying radiance uncertainty

- Understand the **measurement equation**
- Quantify the **sources of error** (effects)
- Quantify each effects' **magnitude** and **error structures**
- Propagate to get radiance **uncertainty**
- **Structured approach centred on measurement equation**




Organise analysis around measurement equation

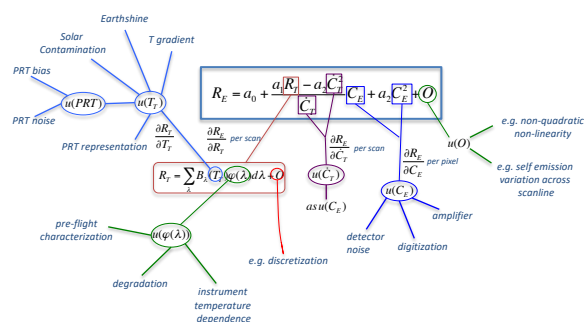


Magnitude of uncertainty

- Even the noise at the counts level can be surprisingly complex

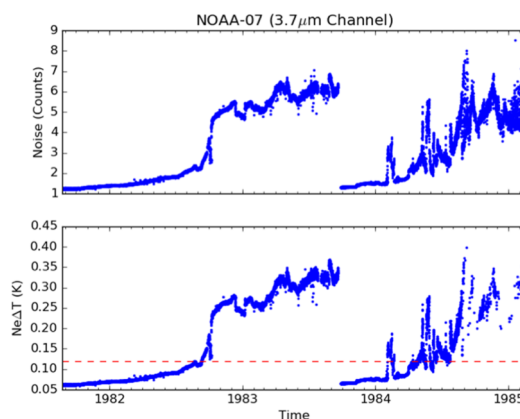


Correlated effects

- For some HIRS strong correlations in noise between channels

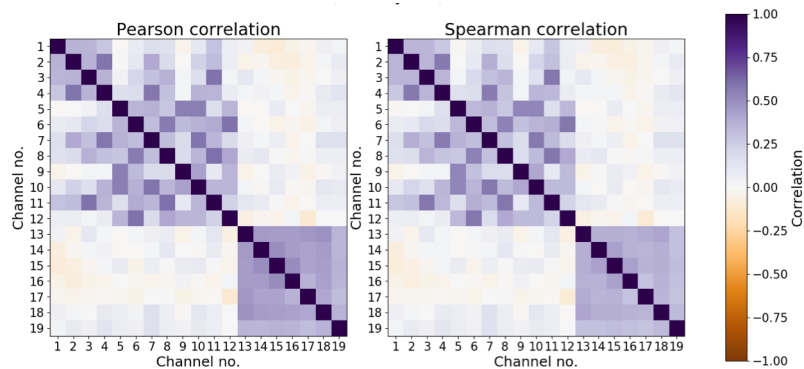

Dominant effects depend on scale (eg SST)

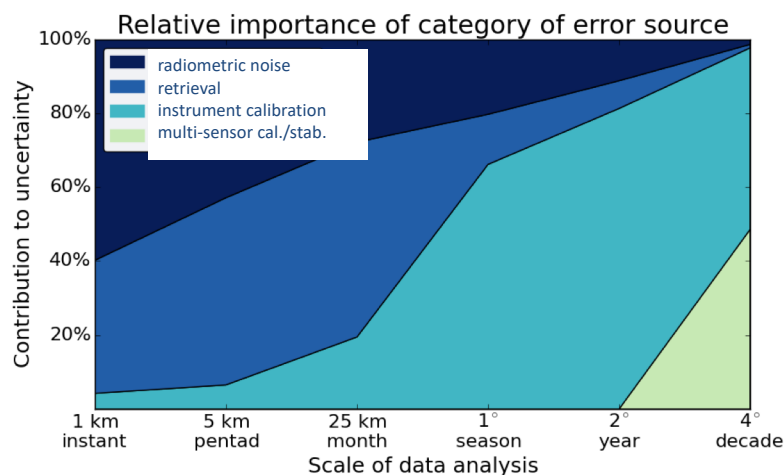

If you compare two measurements on different space-time scales the dominant sources of uncertainty in that difference change.

UNCERTAINTY QUANTIFICATION



- Radiance (reflectance, brightness temperature,...) uncertainty quantification should include:
 - Standard uncertainty estimates
 - Per datum or parameterised if highly variable
 - In components with different spatial correlation structures if necessary, along with correlation information
 - In FIDUCEO, 3-component model (independent, structured and common components)
 - Cross-channel error correlation matrix
 - For geophysical propagation, assimilation etc

LIMITLESS POTENTIAL | LIMITLESS OPPORTUNITIES | LIMITLESS IMPACT

THAT WOULD LET L1 USERS ...



- Propagate radiance uncertainty to L2 CDR
 - Geophysical quantities on satellite projection with U
 - Accounting for error covariance (avoid underestimate)
- Quantify spatio-temporal error correlations L2 CDR
 - Necessary to propagate uncertainty consistently to L3+ CDRs, and climate indices from space data
- Work with CDR users (modellers, etc) to exploit
 - Model evaluation, assimilation, index information ...
- At what investment?
 - U characterization **is** a significant task. But ...

LIMITLESS POTENTIAL | LIMITLESS OPPORTUNITIES | LIMITLESS IMPACT

An uncertainty/traceability focus in Phase B-D

Aspect	Compliance focus	Metrology focus
Estimating the magnitude of pixel-level uncertainty (e.g., in radiance)	Worst-case combination of uncertainty from error sources to compared against a (generally) aggregated total uncertainty requirement. Deliberately pessimistic to ensure compliance and acceptance.	Individual models/calculations of uncertainty from error sources, traceably documented per error source. Realistic combination to inform expected in-flight characteristics.
Characterising the error-correlation structure across pixels and channels	Only in response to specific relevant requirements (e.g. cross-talk limits). Not considered for many error sources.	Integral part of uncertainty characterisation for all error sources

An uncertainty/traceability focus in Phase B-D

Aspect	Compliance focus	Metrology focus
Traceably documenting uncertainty information	Documentation focused on acceptance milestones. Results perhaps mixed with commercially sensitive and confidential material, usually not available in a form supporting traceability	Documentation freely available and organised such as to support systematic traceability
Dissemination of understanding of error sources to users	Not actively or systematically attempted -- generic information may be published. Not quantitatively integrated into satellite products	Understanding is embedded in product processing chain in order to include quantitative uncertainty information directly in satellite products at L1

FCDR Uncertainty: An Aim

Not just for heritage sensors

To support Climate Data Records and environmental applications in general, space agencies should develop and provide:

Fundamental Climate Data Records, comprising a continuous, harmonised record of calibrated, geolocated, **uncertainty-quantified** sensor observations in geophysical units (such as radiance), together with all ancillary and underlying data used to calibrate the observations **and estimate uncertainty**.

CF. GCOS-154: The term “Fundamental Climate Data Record” (FCDR) denotes a well-characterized, long-term data record, usually involving a series of instruments, with potentially changing measurement approaches, but with overlaps and calibrations sufficient to allow the generation of products that are accurate and stable in both space and time to support climate applications. FCDRs are typically physical measurements such as calibrated radiances, backscatter of active instruments, or radio occultation bending angles. FCDRs also include the ancillary data used to calibrate them.



Mittaz, et al, *Metrologia*, submission imminent



Considerations for CEOS/CGMS agencies

- EO measurements are a major data stream quantifying Earth's environments, yet the good practice of providing uncertainty information is not standard at L1/FCDR
 - Some data streams (e.g. in Copernicus) have some uncertainty estimates, at a basic level
- Uncertainty information adequate for CDRs and climate indices is (seen to be) complex
 - More than an uncertainty value, since spatio-temporal and cross-channel error correlation is relevant on multiple scales of climate applications
 - Need for demonstrations of methods, good practice and utility, both at L1/FDR, L2/CDR and propagation to applications and climate indices: a metrology of EO is needed (QA4ECV and now FIDUCEO have started this)
- Providing radiance/L1 uncertainty to users will require some investment and product development, but ...
- ... a significant part of the instrument characterisation need to provide uncertainty is developed in Phase B-D and pre-flight cal., but not communicated to users
- Considerable progress towards L1/FCDR uncertainty can therefore be made by updating and exploiting existing mission/instrument practice for this purpose
 - There are practical challenges, such as structuring industry contracts and reports so that user-oriented uncertainty information is made available in products and user guides
 - Currently, from the radiance user point of view, much instrument characterisation is “under-exploited” – not made available to users, either at all, or in an applicable form



<http://www.fiduceo.eu/blogs>

Beyond FIDUCEO – link to “Green paper”

Satellite missions: metrological upgrade

Harmonisation and Recalibration

Why worry about all sources of errors?



Brief conclusion



- Ideas, methods and tools are emerging to substantially establish “Earth observation metrology”
- Part of this is proper quantification of L1 uncertainty, which logically is a problem owned by space agencies
 - FIDUCEO methodologies, for example, are applicable to prospective missions, not only FIDUCEO case studies and space agency archives
- Much of the necessary insight into instrument errors could be gained by bringing a “metrology focus” to phase B-D satellite development



FIDUCEO has received funding from the European Union's Horizon 2020 Programme for Research and Innovation, under Grant Agreement no. 638822

